

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number  
**WO 2005/014400 A1**

(51) International Patent Classification<sup>7</sup>: **B65B 61/24,**  
11/32

(IT). CAVALLARI, Stefano [IT/IT]; Via del Meloncello,  
5, I-40135 Bologna (IT).

(21) International Application Number:  
PCT/IB2004/002545

(74) Agents: BIANCIARDI, Ezio et al.; Bugnion S.p.A., Via  
Goito, 18, I-40126 Bologna (IT).

(22) International Filing Date: 5 August 2004 (05.08.2004)

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
BO2003A000481 6 August 2003 (06.08.2003) IT

(71) Applicant (*for all designated States except US*):  
**AZIONARIA COSTRUZIONI MACCHINE AU-**  
**TOMATICHE** [IT/IT]; A.C.M.A. S.p.A., Via Cristoforo  
Colombo, 1, I-40131 Bologna (IT).


(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **OLEANDRI, Mau-**  
**rizio** [IT/IT]; Via Quirino di Marzio, 10, I-40133 Bologna

[Continued on next page]

(54) Title: A METHOD AND A DEVICE FOR WRAPPING PRODUCTS

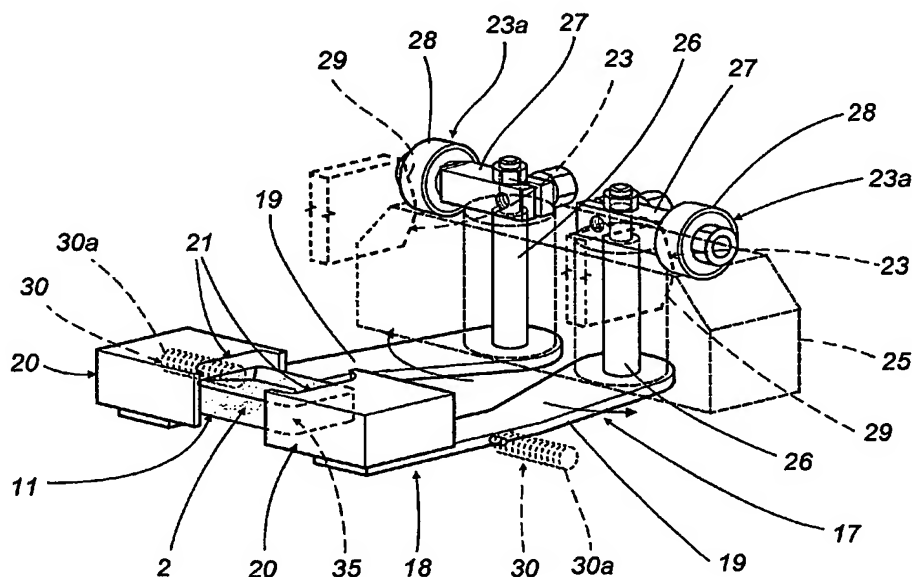

(57) Abstract: Products (2) presenting bevelled or rounded corner edges (35) are advanced singly and in succession along a pre-determined path (P), each enveloped in a wrapper (11) of parallelepiped box-like shape, and directed ultimately into a station (15) where each product (2) is subjected to a finishing step that consists in deforming at least one part of the wrapper (11) and causing it thus to adhere to the surface of the relative product (2), in particular at the bevelled or rounded corner edges (35); thereafter, the finished products (2) are stacked and wrapped in respective stick packs (36) of which the longitudinal corner edges (38) will hug the corner edges (35) of the stacked products (2), adapting to the contours of the bevelled or rounded profile.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*